
Application Description

STATIC REMOVAL ON TURRET WINDERS



iONstream 4.0 network capable AUTO DC Technology[®] ionisation

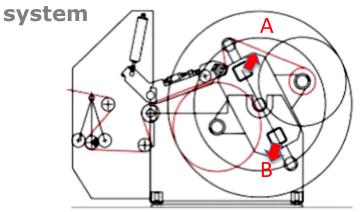

Application Information STATIC CONTROL



a Gema division

ehn

Application Description

iONstream 4.0 the 100% solution for turret winders!

With our **iONstream 4.0** technology you can install the ionising bars via a slip ring for the 24V DC power supply inside the turret at the correct position of the last static generator, the contact rollers. With this unique feature, residual charges below **500V** are possible to be reached at any winding speed and also any position of the substrate during turret movement.

Key Features:

- 6, 12 or 18kV for up to 1500mm distance
- Up to 2.000m/min web speed
- Fully automated AUTO DC Technology[®] ionisation
- All parameters and system efficiency visualized

Our product is ideal for many slitting processes:

- Film
- Paper
- Nonwoven
- Tissue



Find out more:

https://www.hildebrand-technology.com/en/products/ electrostatic_discharging/ionstream_40

